

ComfortLine DIP switch L-R2

Product features

- Linear casing shape

Functions

- Selectable current output via DIP switch
- Suitable for central battery system for emergency lighting acc. to EN 50172

Electrical features


- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- DC operation: 198–276 V, 0 Hz
- Push-in terminals: 0.5–1.5 mm²
- Power factor at full load: 0.96
- Max. working voltage (U_{OUT}): 250 V or 300 V (186824)
- Secondary side switching of LED modules is not allowed.

Safety features

- Protection against transient main peaks up to 1 kV (between L and N) and up to 2 kV (between L, N and PE)
- Electronic short-circuit protection
- Overload protection
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class I

Packaging units

Ref. No.	Packaging unit		Weight g
	Pieces per box	Boxes per pallet	
186820	30	64	169
186824	30	64	173
186982	30	64	180
186983	30	64	176
186984	30	64	176

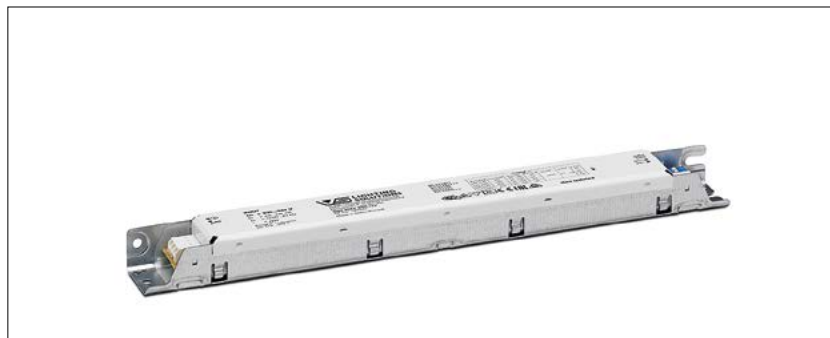


Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 60598-2-22
- EN 55015



Dimensions

- Casing: M7.1
- Length: 280 mm
- Width: 30 mm
- Height: 21 mm

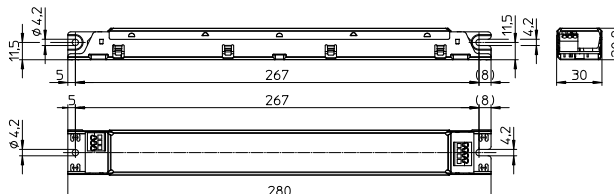

Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
20	ECXe 350.327	186820	220–240	180–170	24 / 132	200	50–100	< 17	90	< 2
25						250			91	
30						300			91	
35						350			92	
24.5	ECXe 250.410	186982	220–240	180–170	19 / 160	175	70–140	< 16	92	< 2
28						200			92	
31.5						225			92	
35						250			91	
36	ECXe 350.331	186824	220–240	310–290	27 / 225	200	85–180	< 12	92	< 2
45						250			93	
54						300			93	
63						350			93	
58	ECXe 700.412	186984	220–240	360–340	25 / 269	550	50–105	< 10	93	< 2
63						600			93	
68						650			93	
73						700			93	
52.5	ECXe 500.411	186983	220–240	370–340	24 / 264	350	75–150	< 9	93	< 2
60						400			93	
67.5						450			93	
75						500			93	

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
186820	-25	+70	5	60	-40	+85	5	95	+75 (200 mA)	IP20
		+65							+75 (250 mA)	
		+65							+75 (300 mA)	
		+60							+75 (350 mA)	
186982	-25	+60	5	60	-40	+85	5	95	+70	IP20
186824	-25	+60	5	60	-40	+85	5	95	+70 (200 mA)	IP20
									+70 (250 mA)	
									+70 (300 mA)	
									+75 (350 mA)	
186984	-25	+50	5	60	-40	+85	5	95	+70	IP20
186983	-25	+60 (350 mA)	5	60	-40	+85	5	95	+70	IP20
		+60 (400 mA)								
		+55 (450 mA)								
		+55 (500 mA)								

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Drivers – ComfortLine DIP switch L-R2

Expected service life time

at operation temperatures at t_c point

Ref. No.	Operation current (mA)	Temperature	Service life hrs.	Temperature	Service life hrs.
186820	200	65 °C	100,000	75 °C	50,000
	250		100,000		50,000
	300		100,000		50,000
	350		100,000		50,000
186982	All	60 °C	100,000	70 °C	50,000
186824	200	60 °C	100,000	70 °C	50,000
	250		100,000		50,000
	300		100,000		50,000
	350	65 °C	100,000	75 °C	50,000
186984	All	60 °C	100,000	70 °C	50,000
186983	All	60 °C	100,000	70 °C	50,000


DIP switch settings

Pin 1	Pin 2	Operation current (mA)			
		186820, 186824	186982	186983	186984
OFF	OFF	200	175	350	550
ON	OFF	250	200	400	600
OFF	ON	300	225	450	650
ON	ON	350	250	500	700


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 186820 / Type ECXe 350.327


Working area

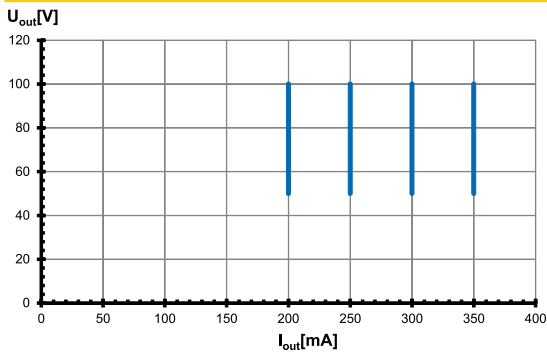


Efficiency

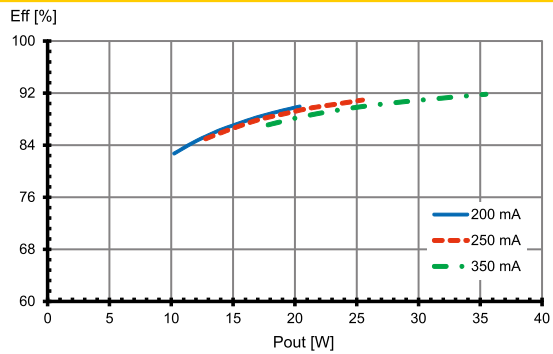

Power factor

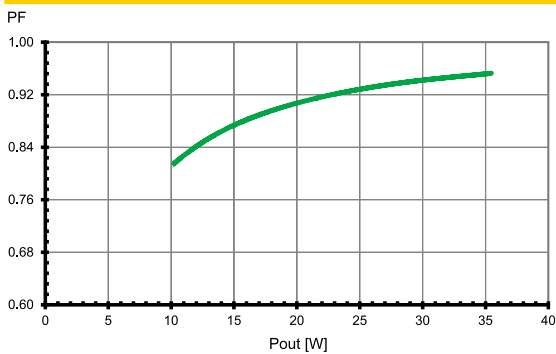


Total harmonic factor (THD)

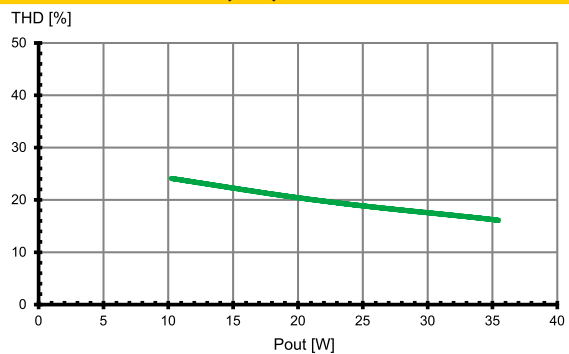


Typ. performance graphs for 186982 / Type ECXe 250.410


Working area

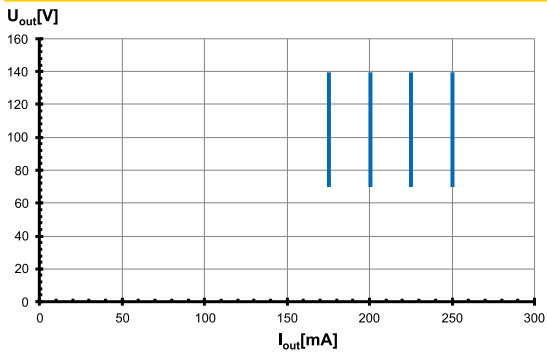


Efficiency

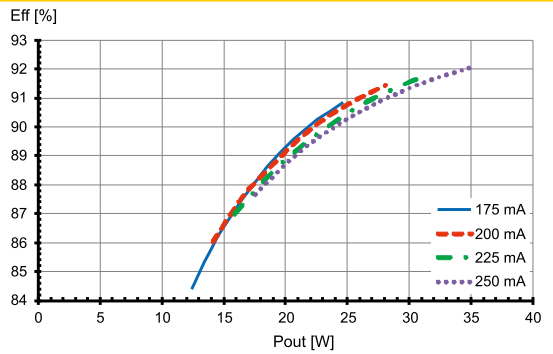

Power factor

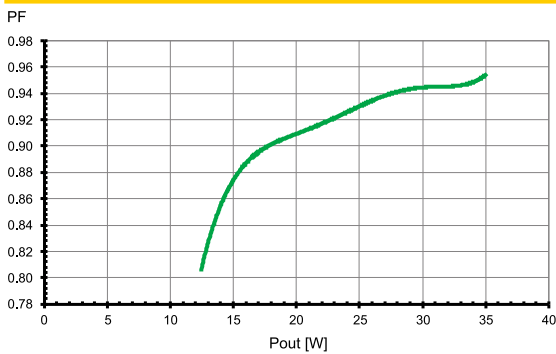

Total harmonic factor (THD)

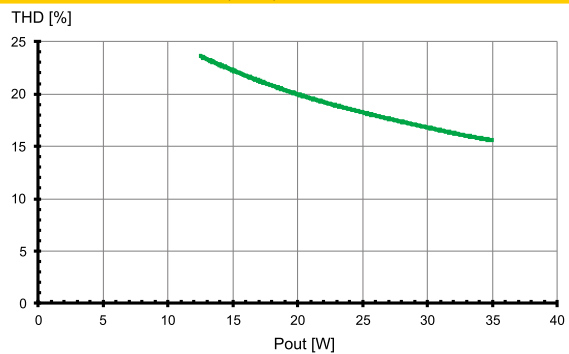


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.


LED Drivers – ComfortLine DIP switch L-R2

Typ. performance graphs for 186824 / Type ECXe 350.331


Working area

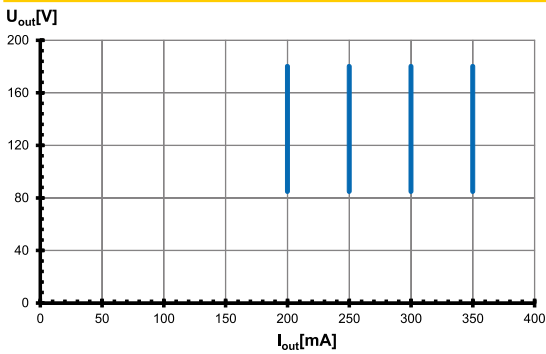


Efficiency

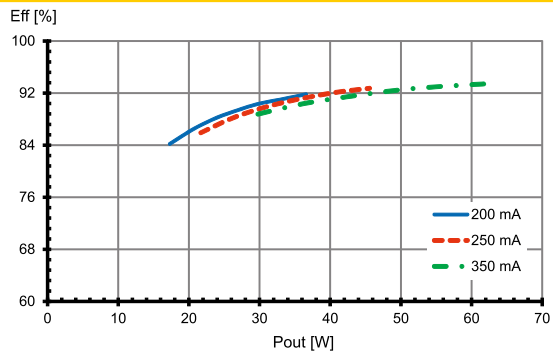

Power factor

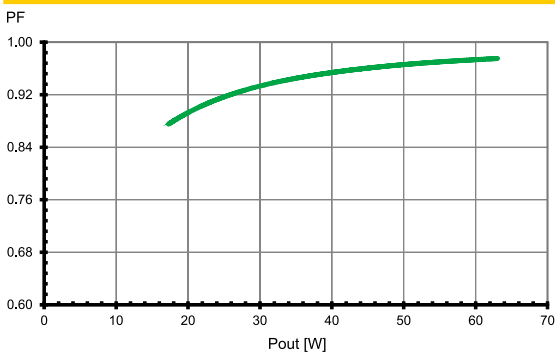


Total harmonic factor (THD)

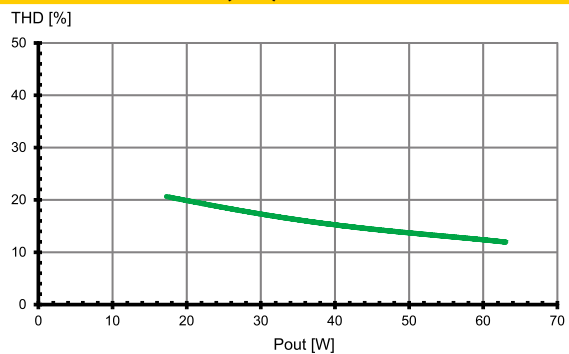


Typ. performance graphs for 186983 / Type ECXe 500.411


Working area

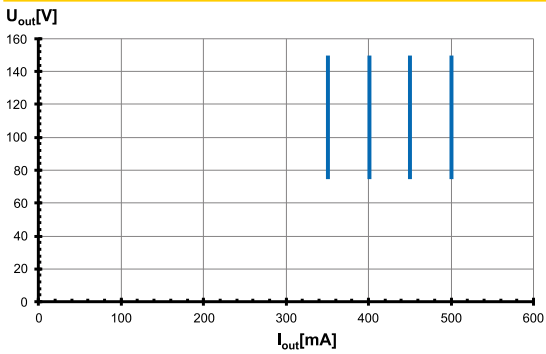


Efficiency

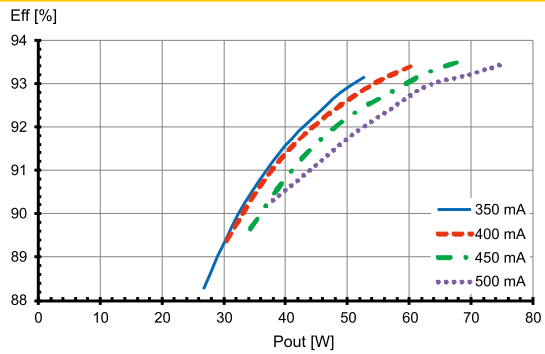

Power factor

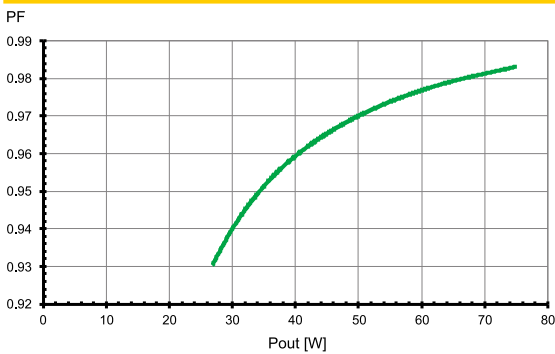


Total harmonic factor (THD)

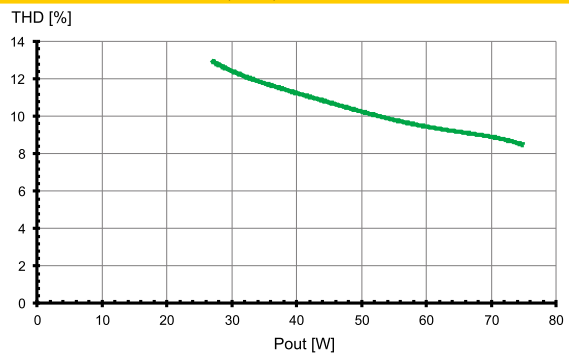


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 186984 / Type ECXe 700.412


Working area

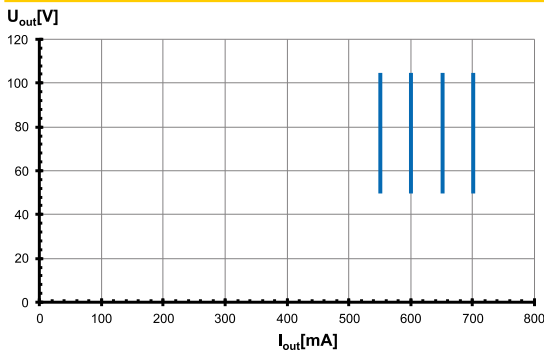


Efficiency

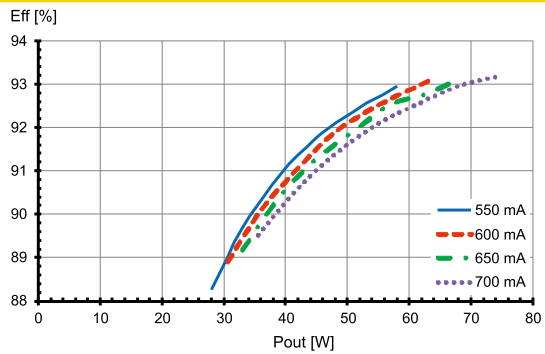

Power factor

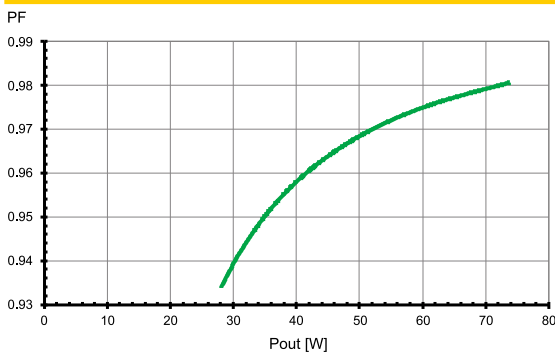

Total harmonic factor (THD)

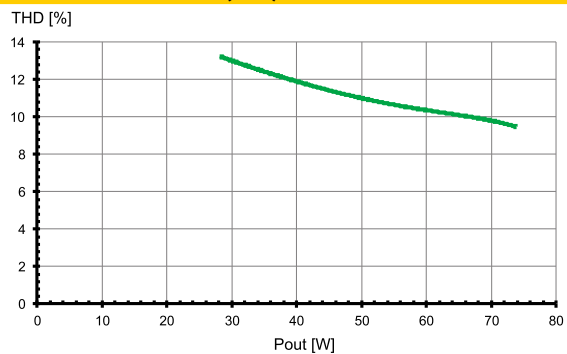

Safety functions

- Transient mains peaks protection:
 - Values are in compliance with EN 61547 (interference immunity).
 - Surges between L-N: up to 1 kV
 - Surges between L/N-PE: up to 2 kV
- Short-circuit protection: The control gears are protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gears only work in range of rated output power and voltage problemfree. Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

DC and emergency lighting operation

The control gears are suitable for direct voltage operation (DC). Reliable DC operation is guaranteed if the specified working area of LED driver is maintained.

- DC range: 198–276 V
- Reducing to 176 V: With reduced service life time possible
- Light level at DC operation (EOF₁): 100% (not adjustable)
- DC operation: 3 hrs. according to EN 50172

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed
Independent application: Drivers are not allowed to use for independent applications
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices.
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.
LED drivers should be mounted with the greatest possible clearance to heat sources.
During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes

Electrical installation

- Connection terminals: Push-in terminals for rigid conductors with a section of 0.5–1.5 mm²; AWG20-16
- Stripped length: 8–9 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.

- Secondary load: The sum of forward voltages of LED loads has to be within the tolerances which are mentioned in the table "Electrical Characteristics" in this data sheet.
- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m Ω (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXe 350.327	186820	27	35	44	45	59	73
ECXe 250.410	186982	27	35	43	45	59	73
ECXe 350.331	186824	13	17	21	22	29	35
ECXe 700.412	186984	12	15	19	20	26	32
ECXe 500.411	186983	12	16	20	21	27	34

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.