

Direct current electronic drivers with DIP-SWITCH
Alimentatori elettronici in corrente continua con DIP-SWITCH

Made in Europe

constant
CURRENT



**RIPPLE
FREE**

2.2

Multipower DIP-SWITCH drivers - Linear case
Alimentatori multipotenza con DIP-SWITCH - Formato lineare



Rated Voltage
Tensione Nominale
220 ÷ 240 V

Frequency
Frequenza
50...60 Hz

AC Operation range
Tensione di utilizzo AC
198 ÷ 264 V

DC Operation range
Tensione di utilizzo DC
DC 176 ÷ 280 V

Power
Potenza
10 ÷ 80 W

Output current ripple
≤ 3%⁽¹⁾

Reference Norms

Norme di riferimento
EN 50172 (VDE 0108)
EN 55015
EN 60598-2-22
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Max. pcs for CB B16A
(see page info17)
30 pcs

In rush current
45A 100µsec

Article Articolo	Code Codice	P out W	V out DC	I out DC	V out max.	ta °C	tc °C	λ Power Factor	η max. Efficiency ⁽¹⁾
MP 80/500 SLIM	122214	73,5	30...210	350 mA cost.	250	-25...+50	85	0,95 ⁽²⁾	> 93
		75,5	30...210	360 mA cost.					
		77,5	30...210	370 mA cost.					
		80	30...210	380 mA cost.					
		80	30...205	390 mA cost.					
		80	30...200	400 mA cost.					
		80	30...195	410 mA cost.					
		80	30...190	420 mA cost.					
		80	30...186	430 mA cost.					
		80	30...181	440 mA cost.					
		80	30...177	450 mA cost.					
		80	30...174	460 mA cost.					
		80	30...170	470 mA cost.					
80	30...166	480 mA cost.							
80	30...163	490 mA cost.							
80	30...160	500 mA cost.							


⁽¹⁾ Referred to $V_{in} = 230V$, 100% load - Riferito a $V_{in} = 230V$, carico 100%

⁽²⁾ $P_{out} > 46W$

BUILT-IN SCREW FIXING

Weight - Peso: gr. 140/5 oz.
Pcs - Pezzi 70

Compatible with ZHAGA (BL2/ZS5 H5D/ ZS5 H7D)

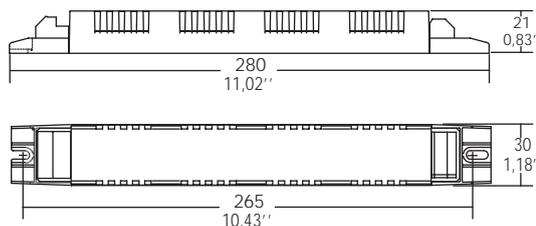

Wiring diagram - Schema di collegamento

(Max. LED distance on page info8 - Massima distanza LED a pagina info8)



Features

- Driver for built-in use.
- Multipower driver supplied with dip-switch for the selection of the output current.
- Active Power Factor Corrector.
- Current regulation ±5 % including temperature variations.
- Output is not isolated from the input.
- It can be used for lighting equipment in protection class I and II.
- Input and output terminal blocks on the opposite sides (wire cross-section up to 1,5 mm² / AWG15).
- Driver can be secured with slot for screws.
- Protections:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads.
- Thermal protection = C.5.e.

Caratteristiche

- Alimentatore da incorporare.
- Alimentatore multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- PFC attivo.
- Corrente regolata ±5 % incluse variazioni di temperatura.
- Uscita non isolata dall'ingresso.
- Utilizzabile per apparecchi di illuminazione in classe di protezione I e II.
- Morsetti di entrata e uscita contrapposti (sezione cavo fino a 1,5 mm² / AWG15).
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
 - termica e cor tococuito;
 - contro le extra-tensioni di rete;
 - contro isovraccarichi.
- Protezione termica = C.5.e.

