
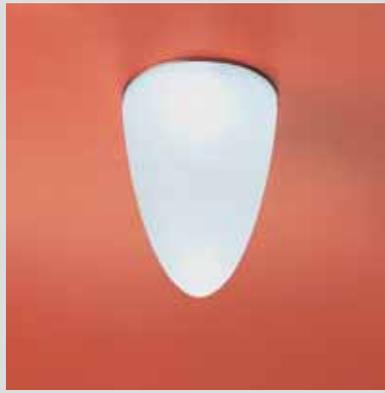


IN LINK








design Roberto Fiorato

Recessed low voltage downlights for 50W 12V halogen lamps comprising:

- Die cast **aluminium** housing
- Satin **glass** diffuser, in seven different shapes (A, B, C, D, E, F and G)
- "D" version is also available with light blue, blue or rose edge glass



GY6,35
1x35W



LAMPHOLDER W COLOUR CLASS CODE NOTES

IN-LINK A

GY6,35 1x50w HSG III • 006296 (

IN-LINK B

GY6,35 1x50w HSG III • 006297 (

IN-LINK C

GY6,35 1x50w HSG III • 006298 (

IN-LINK D

GY6,35 1x50w HSG III • 006299 (

GY6,35 1x50w HSG LBE1 III • 006300 (

GY6,35 1x50w HSG BLE1 III • 006301 (

GY6,35 1x50w HSG PKE1 III • 006302 (

IN-LINK E

GY6,35 1x50w HSG III • 006303 (

IN-LINK F

GY6,35 1x50w HSG III • 006304 (

IN-LINK G

GY6,35 1x50w HSG III • 006305 (



IP 44

class III

IK04 0,5J xx3
IK05 0,7J xx3

230V/50Hz

CE

