


ACCESSORI

-Component

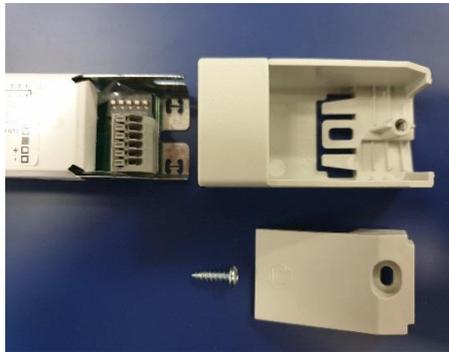

1

- Insert Fully




2

-Turn the driver over







3

- Lift the two outer metal tabs

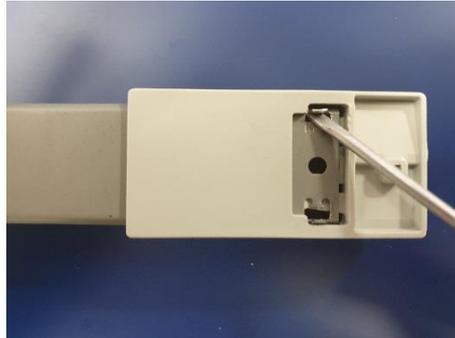

4

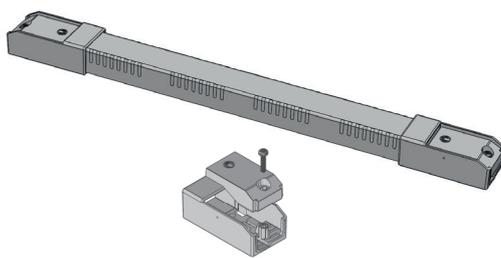

INDEPENDENT TRANSFORMATION KIT

Clamping screw on primary and secondary circuit.
Cables with diameter: min.3 - max. 8 mm
Material: PC V0 self-extinguishing
Grey RAL 7035

Vite di serraggio per circuito primario e secondario.
Cavi di diametro: min. 3 - max. 8 mm
Materiale: PC V0 autoestinguente
Grigio RAL 7035

**Article
Articolo**

KIT code composition: 488787559K1

Body: 488787559 n.2
Clamp: 488787560 n.2
Screw: 427760020 n.2 (3,4x13mm)

50 KIT minimum - minimo

Synchronization accessories and other products
Accessori sincronismo e altri prodotti

12.8