





# Ballasts for Fluorescent & Compact Fluorescent Lamps

For lamp types T, T-U, T-R  
tw 130  
Protection Group I  
IEC 82, EN 61347/60921, SI 397

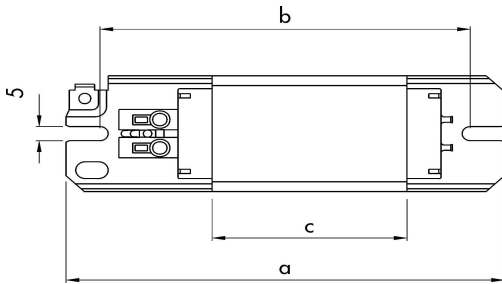

## Fluorescent Ballasts 220V/50Hz

Screw terminals are available on request.

Type	VS ref. No.	$\Delta t / \Delta t_{tab}$ IEC	a (mm)	b (mm)	c (mm)	Weight (kg)	Copper Weight (gm)	PF Cap. ( $\mu F \pm 5\% / V$ )	Lamp Type	Lamp (W)	Current (A)	Pallet (pcs)
L4/6/8.265	534142	40/60	100	85	34	0.310	45	2.0	T5	1x4	0.170	2100
								2.0	T5	1x6	0.160	
								2.0	T5	1x8	0.145	
L7/9/11.259	534143	50/75	100	85	34	0.310	45	2.0	TC-S	1x5	0.180	2100
								2.0	TC-S	1x7	0.175	
								2.0	TC-S	1x9	0.170	
								2.0	TC-S	1x11	0.155	
L13.103	534144	50/80	100	85	34	0.310	45	2.0	TC-D	1x10	0.190	2100
								2.0	T5	2X8	0.145	
								2.0	TC-S	2X5	0.180	
								2.0	TC-S	2X7	0.175	
								2.0	TC-S	2X9	0.170	
L18.240	-	60/160	100	85	34	0.310	45	2.0	TC-D/T	1X18	0.22	2100
L15.256	534145	60/95	155	137	60	0.51	55	3.5	T8	1x15	0.310	1500
L18.257	534146	55/110	155	137	60	0.51	55	4.0	TC-D/T	1X26	0.325	1500
		60/110						4.0	TC-L	1X24	0.345	
		70/115						4.0	TC-L	1X18	0.370	
		70/115						4.0	T8	18/20	0.370	
L30.264	534147	60/165	155	137	60	0.51	55	4.0	T8	1x30	0.365	1500
L36.170 (*)	527460	65/125	155	137	60	0.50	55	4.0	T8	2X18/20	0.370	1500
		65/125						4.0	TC-L	2X18	0.370	
		70/175						4.0	T8	36/40	0.430	
		70/175						4.0	TC-L	36	0.430	
L36.171	548078	65/125	155	137	50	0.44	55	4.0	T8	2X18/20	0.370	1500
		65/125						4.0	TC-L	2X18	0.370	
		70/170						4.0	T8	36/40	0.430	
		70/170						4.0	TC-L	36	0.430	
L58.258	534148	65/175	195	157	103	0.90	95	6.0	T8	58/65	0.670	1200

Other types are available on request.

VDE approved ballasts are marked with |\*|